

# Columns



DECORATION FOR FAÇADES

***A classical note to give elegance to your projects***

The Weser column is an interior or exterior decorative element which can be used as a structural element if necessary. If this is the case, steel reinforcing rods must be used and the column must be filled with concrete.

Capital



Fluted shaft




Fluted shaft



Round base



Square base



Pedimented portico on dia.26 columns



Dia.35 fluted shaft



Dia.26 fluted shaft



Dia.35 smooth shaft

4.054

Product Name	Colour	35cm dia. columns <i>size</i>		26cm dia. columns <i>size</i>		<i>weight</i>
Shaft element	P/B	Ø 35 x 25cm	24kg	Ø 26 x 25cm		13kg
Round base	P/B	Ø 35/50 x 20cm	38kg	Ø 26/38 x 17cm		22kg
Capital	P/B	Ø 35/50 x 20cm	38kg	Ø 26/38 x 17cm		22kg
Square base	P/B	52 x 52 x 8,5cm	38kg	40 x 40 x 8cm		21kg


Columns are available with a smooth finish or with a fluted shaft.

### LAYING

The Weser column is made up of interlocking elements laid on one another, and is mainly used as a decorative element. It can also be used as a structural element, under certain circumstances (the load must be calculated), for example to support terraces or pediments.

The Weser column must be laid on a reinforced concrete base, designed for the load it bears and for the type of ground underneath. A mastic joint is used between elements for waterproofing. Steel reinforcing rods must be used in the column, and it must be filled with concrete using the elements as formwork. The hollow core should be lined with a resilient material such as polystyrene or similar. This sheet will absorb differences of dilatation between the filling concrete and column elements in order to avoid any risk of cracking. To keep the column clean during filling, we recommend placing polythene sheeting over the capital.

During filling, avoid pouring the concrete from too great a height, and pour slowly, to avoid putting too much pressure on the lower elements. Clean any excess mortar immediately using plenty of clean water.

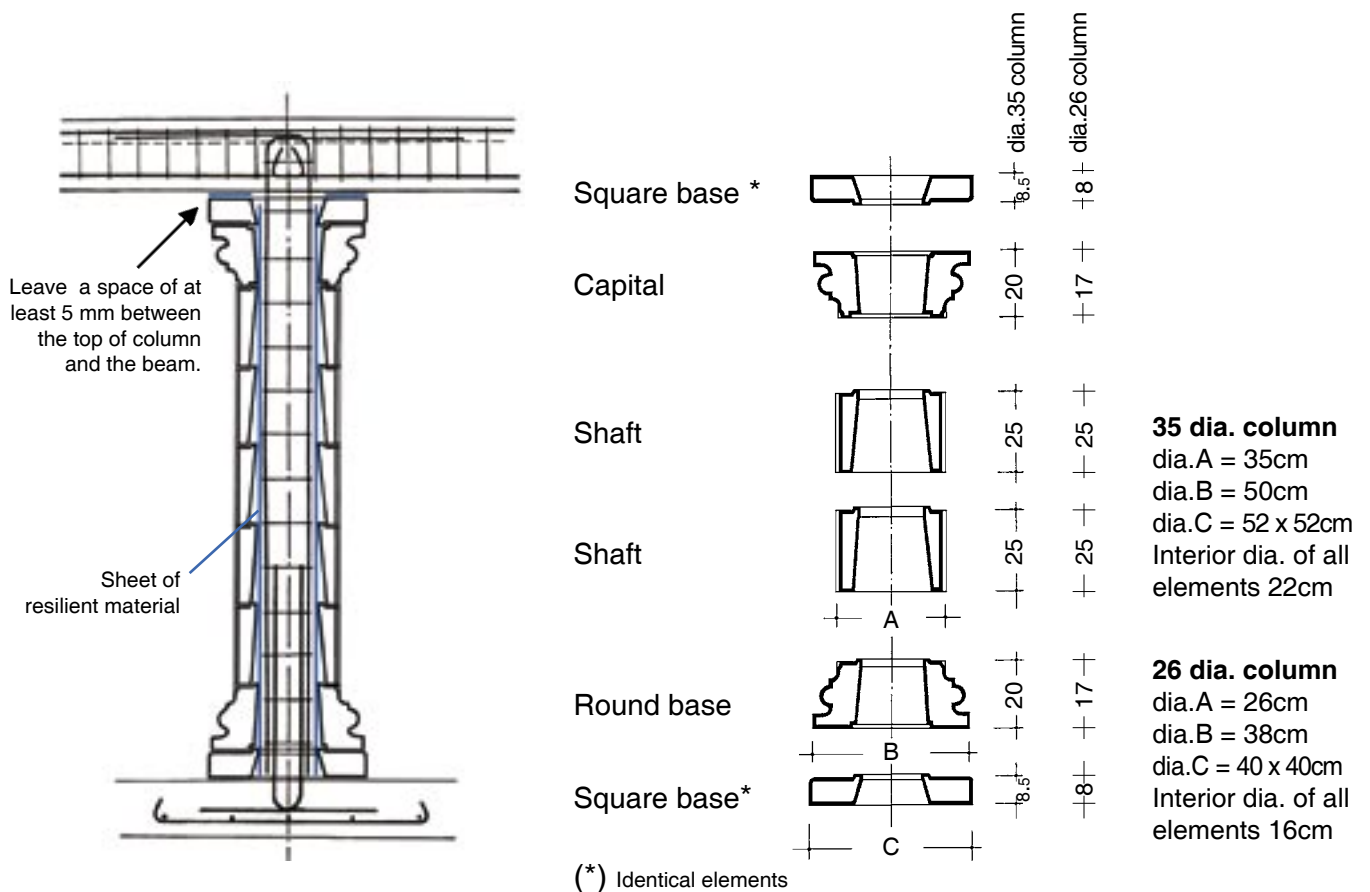

WESER SA  
 F 37130 MAZIERES DE TOURAINE  
 Tel. 33 247 96 23 23  
 Fax 33 247 96 44 69  
 Internet www.weser.fr

Your local distributor :

Because they are made with natural aggregates, these products may vary slightly in colour. We strongly recommend mixing the blocks when laying them to obtain best results. In order to improve its products, Weser reserves the right to modify them without notice.